



Rugged & Reliable Means Peace of Mind.

The Curtain and Inlet Operators from VAL-CO® are made for the long haul because they are specifically engineered for optimum performance in the harshest conditions. SafeTRAC Gen III Operators are the most durable performers in the business and they will provide you with a smooth and quiet operation for many years.

The newly redesigned indoor SafeTRAC Gen III Acme-screw models are available in 24", 36", 48" and 72" sizes with a 110/220V, 60/50Hz, 1PH motor for domestic and international use. Each model also includes:

- Installation options to fit any application
- Greasable needle bearing pulleys
- Helical gears for maximum efficiency and performance
- Safety features to prevent over-run damage
- Up to 4,000 lb. (1.800 kg.) capacity
- Interior installation
- Polymer thread block engineered for superior performance and longevity

Options available:

- Swivel chain and sprocket (replaces pulleys)
- Local control switches
- Potentiometer feedback kit (10-turn)
- Interlock switch to operate associated equipment
- Weather guard



Performance You Can Count On

Right: Optional swivel chain and sprocket is also available.



Winches, Pulleys & Winch Handles

We carry a wide variety of winches and pulleys for practically any type of application you may have. Finish off your project with our large selection of winching components and accessories. Below, on the right, are two of the more popular winch handles we carry - Winch Handle with Grip Tubes & Adjustable Winch Handle (6 - 12").




Indoor Curtain Machines

We carry a wide variety of models of our curtain machines allowing you to select the one that is perfect for your application.

Model	Length	Screw Type	Voltage	HZ	Phase	Approx. Speed @ 50/60HZ	Top Assembly	Clutch
970532-24	24"	Acme	220	50/60	1	4/4.8 in/min	Pulley	N
970532-36	36"	Acme	220	50/60	1	4/4.8 in/min	Pulley	N
970532-48	48"	Acme	220	50/60	1	4/4.8 in/min	Pulley	N
970532-72	72"	Acme	220	50/60	1	4/4.8 in/min	Pulley	N
970536-24	24"	Acme	220	50/60	1	4/4.8 in/min	Sprocket	N
970536-36	36"	Acme	220	50/60	1	4/4.8 in/min	Sprocket	N
970536-48	48"	Acme	220	50/60	1	4/4.8 in/min	Sprocket	N
970536-72	72"	Acme	220	50/60	1	4/4.8 in/min	Sprocket	N
970540-24	24"	Acme	110	50/60	1	4.2/5 in/min	Pulley	N
970540-36	36"	Acme	110	50/60	1	4.2/5 in/min	Pulley	N
970540-48	48"	Acme	110	50/60	1	4.2/5 in/min	Pulley	N
970540-72	72"	Acme	110	50/60	1	4.2/5 in/min	Pulley	N
970544-24	24"	Acme	110	50/60	1	4.2/5 in/min	Sprocket	N
970544-36	36"	Acme	110	50/60	1	4.2/5 in/min	Sprocket	N
970544-48	48"	Acme	110	50/60	1	4.2/5 in/min	Sprocket	N
970544-72	72"	Acme	110	50/60	1	4.2/5 in/min	Sprocket	N

NOTE: If you would like Manual Override Switches installed, add "-SW" to the end of the part number.

Designed for indoor reliability.

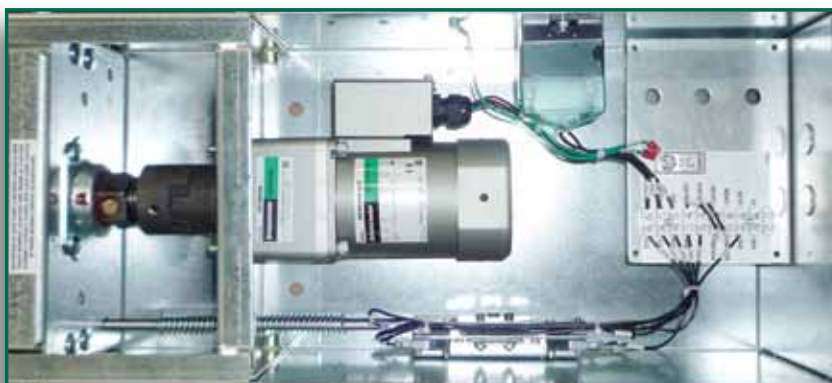

Call your local **VAL-CO** representative or distributor for more information on this and other fine quality products.

North America:

Phone: 800-99VALCO (800-998-2526)

Fax: (+1) 419-678-2200

E-mail: sales@val-co.com

International:

Phone: (+1) 419-678-8731

Fax: (+1) 419-678-2200

E-mail: intl.sales@val-co.com



Performance You Can Count On

www.val-co.com